## **Technical data sheet** Sprint screw, with Philips screw

### Item number: 3195694



Hardened steel, electrogalvanised and Hostaflon-coated. Pan head with combined Phillips and slotted head (Pozidriv size 2 except Ø 6 mm Pozidriv size 3).

The use of Sprint screws leads to considerably reduced screw-in times compared with standard screws. This noticeable advantage comes from the point with the first thread, which leads on to the double thread beyond.

Areas of use: wood, chipboard, Rigips panels, plastic anchors.





#### Master data


Item number3195694Description 1Sprint screwDescription 2panhead, +/- slot driveManufacturerOBODimension5x60mmMaterialSteelSurfaceElectrogalvanizedSurface standardEN ISO 19598 / EN ISO 4042Smallest sales unit200		
Description 2panhead, +/- slot driveManufacturerOBODimension5x60mmMaterialSteelSurfaceElectrogalvanizedSurface standardEN ISO 19598 / EN ISO 4042	Item number	3195694
ManufacturerOBODimension5x60mmMaterialSteelSurfaceElectrogalvanizedSurface standardEN ISO 19598 / EN ISO 4042	Description 1	Sprint screw
Dimension 5x60mm   Material Steel   Surface Electrogalvanized   Surface standard EN ISO 19598 / EN ISO 4042	Description 2	panhead, +/- slot drive
Material Steel   Surface Electrogalvanized   Surface standard EN ISO 19598 / EN ISO 4042	Manufacturer	OBO
Surface     Electrogalvanized       Surface standard     EN ISO 19598 / EN ISO 4042	Dimension	5x60mm
Surface standard EN ISO 19598 / EN ISO 4042	Material	Steel
	Surface	Electrogalvanized
Smallest sales unit 200	Surface standard	EN ISO 19598 / EN ISO 4042
	Smallest sales unit	200
Unit of quantity Piece	Unit of quantity	Piece
Weight 0.585 kg	Weight	0.585 kg
Weight unit kg/100 pc.	Weight unit	kg/100 pc.

# **Technical data sheet**

Sprint screw, with Philips screw

### Item number: 3195694



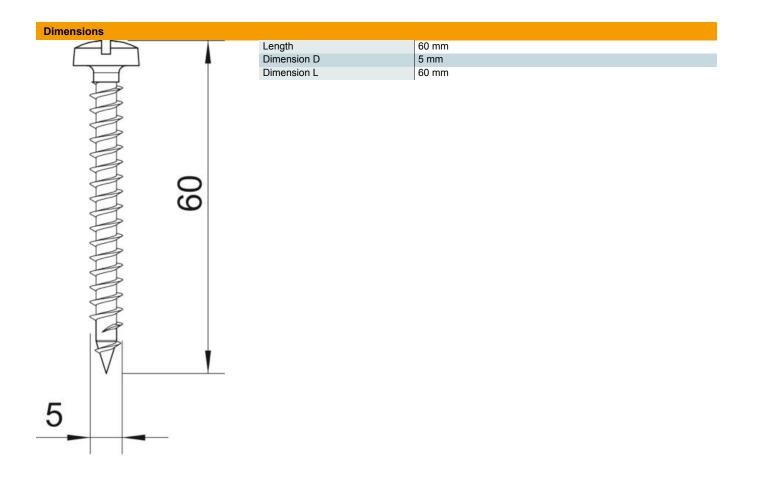



Technical data

Hardened	yes
Head diameter	9.5 mm
Head shape	Panhead
Screw system	Combination slot
Two-compartment	yes