

Technical data sheet

Construction clamp to 20 mm

Item number: 5304520



- Mounting of the round conductor possible vertically or transverse to construction
- For fastening to constructions up to a flange thickness of 20 mm
- Fastening to constructions using a hexagonal bolt M10
- Meets the requirements of VDE 0185-305 (IEC 62305)



St Steel

FT Hot-dip galvanised

Master data

Item number	5304520
Type	5010 20 FT
Description 1	Construction clamp
Manufacturer	OBO
Dimension	20mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	10
Unit of quantity	Piece
Weight	30.6 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,0279 kg CO2e / 1 Piece


Technical data sheet

Construction clamp to 20 mm

Item number: 5304520



Dimensions

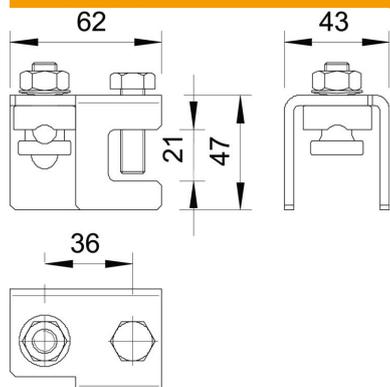

Technical data

Type of fastening screw	Hexagonal bolt
Type of connector	Construction clamp
Lightning current carrying capacity	N/50 kA
Suitable for connection	Miscellaneous
Fit	Rd 8-10 mm
Intermediate plate	no
Clamping range, max.	20 mm
Clamping range, min.	4 mm