

Technical data sheet

AML3518 anchor rail, slot 16.5 mm, A2, unperforated

Item number: 1112007



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|-----------------------------------|---------------------------|
| Item number | 1112007 |
| Description 1 | Profile rail |
| Description 2 | unperforated, slot 16.5mm |
| Manufacturer | OBO |
| Dimension | 2000x35x18 |
| Material | Stainless steel |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 90 kg |
| Weight unit | kg/100 m |
| CO Footprint (GWP) Cradle-to-Gate | 4,412 kg COe / 1 Meter |


Technical data sheet

AML3518 anchor rail, slot 16.5 mm, A2, unperforated

Item number: 1112007



Dimensions

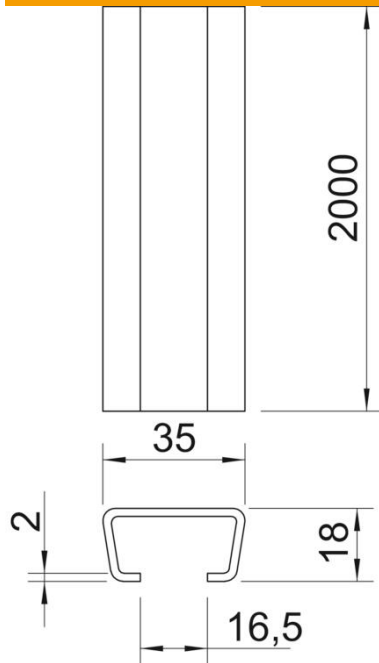

| | |
|-------------|----------|
| Length | 2,000 mm |
| Width | 35 mm |
| Height | 18 mm |
| Dimension L | 2,000 mm |

Technical data

| | |
|-------------------------------|----------------------|
| Breakable | no |
| Type of perforation | Without |
| Version for | Single profile |
| Maintain electrical functions | no |
| Material thickness | 1.5 mm |
| With perforation | no |
| With tothing | no |
| Profile shape | C profile |
| Slot width | 16.5 mm |
| Static value A | 1.48 cm ² |
| Static value I _y | 0.6 cm |
| Static value I _z | 2.33 cm |
| Static value W _y | 0.54 cm ² |
| Static value W _z | 1.33 cm ² |