


# Technical data sheet

Anchor rail AML3518, slot width 16.5 mm, FS, perforated

Item number: 1112735



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.

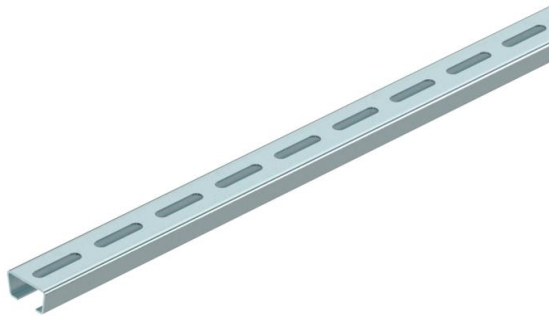

|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanized |

## Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 1112735                 |
| Type                               | AMS3518P1000FS          |
| Description 1                      | Profile rail            |
| Description 2                      | perforated, slot 16.5mm |
| Manufacturer                       | OBO                     |
| Dimension                          | 1000x35x18              |
| Material                           | Steel                   |
| Surface                            | Strip galvanized        |
| Surface standard                   | DIN EN 10346            |
| Smallest sales unit                | 1                       |
| Unit of quantity                   | Metre                   |
| Weight                             | 115 kg                  |
| Weight unit                        | kg/100 m                |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,7435 kg COe / 1 Meter |


# Technical data sheet

Anchor rail AML3518, slot width 16.5 mm, FS, perforated

Item number: 1112735



## Dimensions

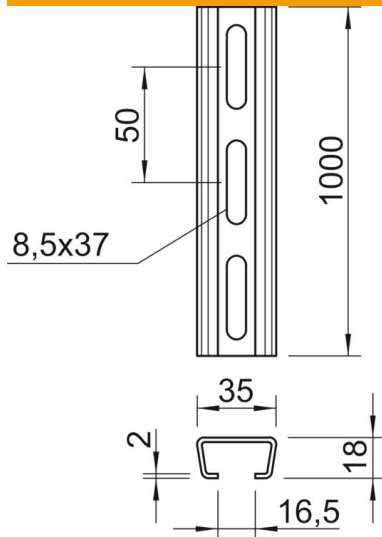

|             |          |
|-------------|----------|
| Length      | 1,000 mm |
| Width       | 35 mm    |
| Height      | 18 mm    |
| Dimension L | 1,000 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | Perforated back      |
| Version for                   | Single profile       |
| Drill hole spacing, centre    | 50 mm                |
| Maintain electrical functions | yes                  |
| Material thickness            | 2 mm                 |
| With perforation              | yes                  |
| With tothing                  | no                   |
| Profile shape                 | C profile            |
| Slot width                    | 16.5 mm              |
| Static value A                | 1.01 cm <sup>2</sup> |
| Static value I <sub>y</sub>   | 0.44 cm              |
| Static value I <sub>z</sub>   | 1.84 cm              |
| Static value W <sub>y</sub>   | 0.42 cm <sup>2</sup> |
| Static value W <sub>z</sub>   | 1.05 cm <sup>2</sup> |