Technical data sheet

GES4M-2 service outlet with handle clamp

Item number: 7405191



Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors for indoor use.

Locking ladder made of galvanised sheet steel. The floor covering thickness is

set to 5 mm, adjustable to 10 mm if necessary. Up to 4 installation devices with 50 mm central plate can be inserted. Service outlet with handle clamp, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.





Stainless steel A2


Master data

Item number	7405191
Туре	GES4M-2 10U
Description 1	Service outlet
Description 2	for universal mounting
Manufacturer	OBO
Dimension	223x223x70
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	260 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	15,4339 kg CO2e / 1 Piece

Technical data sheet

GES4M-2 service outlet with handle clamp

Item number: 7405191

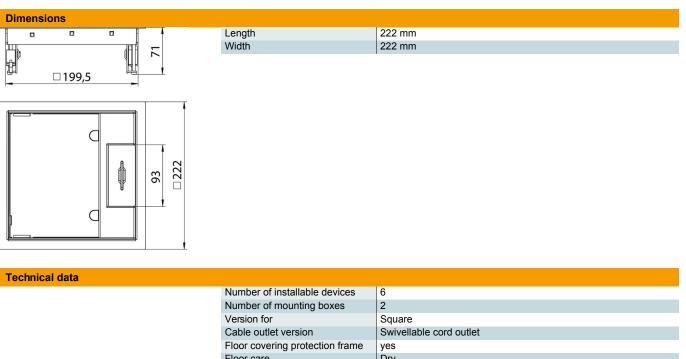

Cable outlet version	Swivellable cord outlet
Floor covering protection frame	yes
Floor care	Dry
Seal installation option	no
Floor height, min.	78 mm
Suitable for raised floor installati- on	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered un- derfloor ducts	yes
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor box	250/350
Suitable for underfloor ducts	yes
Device support to accept moun- ting boxes	yes
Length of external dimensions	222 mm
Length of installation dimensions	201 mm
With floor covering recess	yes
Nominal size for device installati- on units	4
Frame version	Carpet protection frame
Protection rating (IP) when used	IP20
Protection rating (IP) when unu- sed	IP40
Protection rating IK code	IK10
Heavy-duty version	no
Installation system type	MT3 / GB2
Vertical load, large area	to 5,000 N
Vertical load, small area	to 3,000 N



Technical data sheet

GES4M-2 service outlet with handle clamp

Item number: 7405191



Technical data

Approvals	VDE
Opening mechanism	Handle
Floor covering thickness	5 mm
Floor covering thickness max.	10 mm