

# Technical data sheet

## Trunking, type WDK 25040

Item number: 6026488



Wall and ceiling trunking, halogen-free, consisting of cover and base for mounting directly on the wall.  
During installation, ensure that only halogen-free accessories and fastening materials are used.



**PVC** Polyvinylchloride

### Master data

|                                   |                         |
|-----------------------------------|-------------------------|
| Item number                       | 6026488                 |
| Type                              | WDK25040SW              |
| Description 1                     | Wall trunking system    |
| Description 2                     | with base perforation   |
| Manufacturer                      | OBO                     |
| Dimension                         | 2000x40x25              |
| Colour                            | Jet black; RAL 9005     |
| Material                          | Polyvinylchloride       |
| Smallest sales unit               | 24                      |
| Unit of quantity                  | Metre                   |
| Weight                            | 30 kg                   |
| Weight unit                       | kg/100 m                |
| CO Footprint (GWP) Cradle-to-Gate | 0,4941 kg COe / 1 Meter |


# Technical data sheet

## Trunking, type WDK 25040

Item number: 6026488



### Dimensions

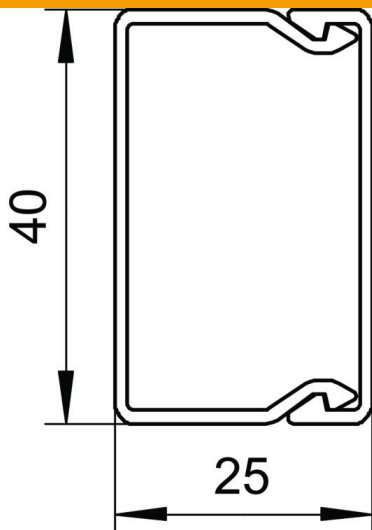

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 40 mm    |
| Height | 25 mm    |

### Technical data

|                                                                         |                     |
|-------------------------------------------------------------------------|---------------------|
| Number of fixed partitions                                              | 0                   |
| Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket) | 5                   |
| Number of cables NYM 3 x 2.5 mm <sup>2</sup> Ø 11.5 mm (without socket) | 3                   |
| Number of cables NYM 5 x 1.5 mm <sup>2</sup> Ø 12.0 mm (without socket) | 3                   |
| Number of insertable partitions                                         | 0                   |
| Version, cable trunking cover                                           | Loose               |
| Fastening type                                                          | Base perforation    |
| Maintain electrical functions                                           | no                  |
| Halogen-free                                                            | no                  |
| Cable retaining clip                                                    | no                  |
| Duct connector                                                          | no                  |
| Delivery on a roll                                                      | no                  |
| Usable cross-section                                                    | 792 mm <sup>2</sup> |
| Protection rating                                                       | IP30                |
| Protective film                                                         | no                  |
| Protection rating IK code                                               | IK04                |
| Permitted temperature range, max.                                       | 60 °C               |
| Permitted temperature range, min.                                       | -5 °C               |