


# Technical data sheet

## T and intersection cover, for trunking type WDK 30045

Item number: 6175698



T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

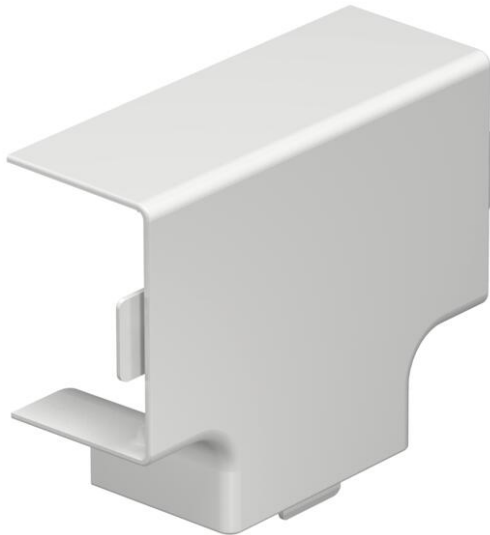

Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

|                     |                                              |
|---------------------|----------------------------------------------|
| Item number         | 6175698                                      |
| Type                | WDKH-T30045RW                                |
| Description 1       | T- and crosspiece cover                      |
| Description 2       | halogen-free                                 |
| Manufacturer        | OBO                                          |
| Dimension           | 30x45mm                                      |
| Colour              | Pure white; RAL 9010                         |
| Material            | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 4                                            |
| Unit of quantity    | Piece                                        |
| Weight              | 1.803 kg                                     |
| Weight unit         | kg/100 pc.                                   |


# Technical data sheet

T and intersection cover, for trunking type WDK 30045

Item number: 6175698



## Dimensions

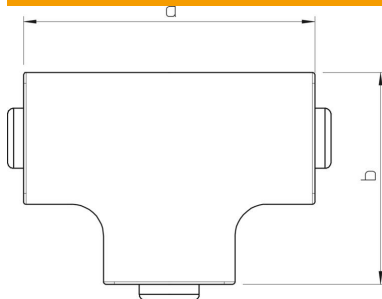

|             |       |
|-------------|-------|
| Length      | 88 mm |
| Width       | 45 mm |
| Height      | 30 mm |
| Dimension a | 88 mm |
| Dimension b | 68 mm |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Fastening type                    | Lockable     |
| Maintain electrical functions     | no           |
| for duct dimension                | 30 x 45      |
| Halogen-free                      | yes          |
| Duct height, min.                 | 45 mm        |
| Trunking depth                    | 30 mm        |
| Protection rating                 | IP30         |
| Protective film                   | no           |
| Protection rating IK code         | IK07.        |
| Permitted temperature range, max. | 90 °C        |
| Permitted temperature range, min. | -5 °C        |