

# Technical data sheet

## Nail tie with nail head G

Item number: 3499010



Nail tie with nail head for the anchoring of, for example, fire protection products, mounting rails, metal clips, substructures made of wood and metal, etc. on walls and ceilings from cracked concrete in indoor and outdoor areas. To knock in with a hammer or rotary drill. When loads occur the nail tie spreads out automatically and anchors itself in the drill hole. Rustproof and highly corrosion-resistant. Fire-safety tested, fire protection class R 120 according to European Technical Assessment ETA-06/0175.




|           |                   |
|-----------|-------------------|
| <b>St</b> | Steel             |
| <b>G</b>  | Electrogalvanised |

### Master data

|                     |                            |
|---------------------|----------------------------|
| Item number         | 3499010                    |
| Type                | FNAII 6x30/5               |
| Description 1       | Nail anchor                |
| Description 2       | with nailhead              |
| Manufacturer        | OBO                        |
| Dimension           | 6x42,5                     |
| Colour              | zinc                       |
| Material            | Steel                      |
| Surface             | Electrogalvanised          |
| Surface standard    | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 100                        |
| Unit of quantity    | Piece                      |
| Weight              | 1.065 kg                   |
| Weight unit         | kg/100 pc.                 |

### Dimensions

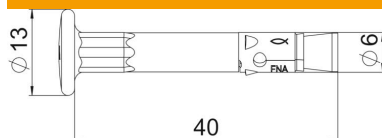

|             |         |
|-------------|---------|
| Length      | 42.5 mm |
| Dimension L | 42.5 mm |

# Technical data sheet

Nail tie with nail head G

Item number: 3499010



## Technical data

|                            |                                             |
|----------------------------|---------------------------------------------|
| Version for                | Lightning strike                            |
| Fastening unit             | Miscellaneous                               |
| Drill hole depth           | 45 mm                                       |
| Drill hole diameter, min.  | 6 mm                                        |
| Clamping strength          | 5 mm                                        |
| ROHS-conformant            | yes                                         |
| Self-drilling              | no                                          |
| Approvals available        | yes                                         |
| Suitable for material      | Calcareous sandstone Concrete Natural stone |
| Mounting type, anchor, tie | Push-through mounting                       |