

# Technical data sheet

End piece, for device installation trunking Rapid 80 type  
GA-70170  
Item number: 6279470



End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.



Alu Aluminium


| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 6279470                  |  |
| Type                               | GA-E70170RW              |  |
| Description 1                      | End piece                |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 70x170x37                |  |
| Colour                             | Pure white; RAL 9010     |  |
| Material                           | Aluminium                |  |
| Smallest sales unit                | 1                        |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 13.4 kg                  |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,5956 kg CO2e / 1 Piece |  |

# Technical data sheet

End piece, for device installation trunking Rapid 80 type  
GA-70170  
Item number: 6279470



## Dimensions

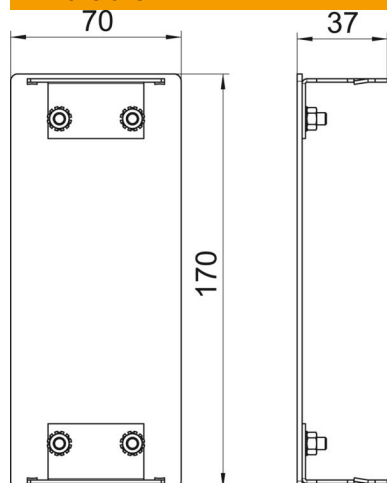

|        |        |
|--------|--------|
| Length | 37 mm  |
| Width  | 170 mm |
| Height | 70 mm  |

## Technical data

|                                   |             |
|-----------------------------------|-------------|
| Version for                       | Symmetrical |
| Fastening type                    | Lockable    |
| for duct width                    | 170 mm      |
| for trunking height               | 70 mm       |
| Suitable for                      | Left/right  |
| Halogen-free                      | yes         |
| ROHS-conformant                   | yes         |
| Cut lamination                    | no          |
| Protection rating                 | IP30        |
| Protective film                   | yes         |
| Protection rating IK code         | IK10        |
| Permitted temperature range, max. | 60 °C       |
| Permitted temperature range, min. | -25 °C      |